


Light Duty Actuator Size 15



-
- STEEL FAST TWIST ACME LEAD SCREW,
 - 1 ROTATION = .250"
 - 4 STARTS
 - 1/4"-16 THREAD
- DELRIN ANTI-BACKLASH NUT
- LINEAR BALL BEARING GUIDANCE
- CUSTOM STROKE LENGTHS
 - MINIMUM 7"
 - MAXIMUM 31"
- NEMA 17 MOTOR MOUNT
- STANDARD OR CUSTOM MOUNTING HOLE LOCATIONS AT NO ADDITIONAL CHARGE
- DOWEL HOLES FOR PRECISE MOUNTING

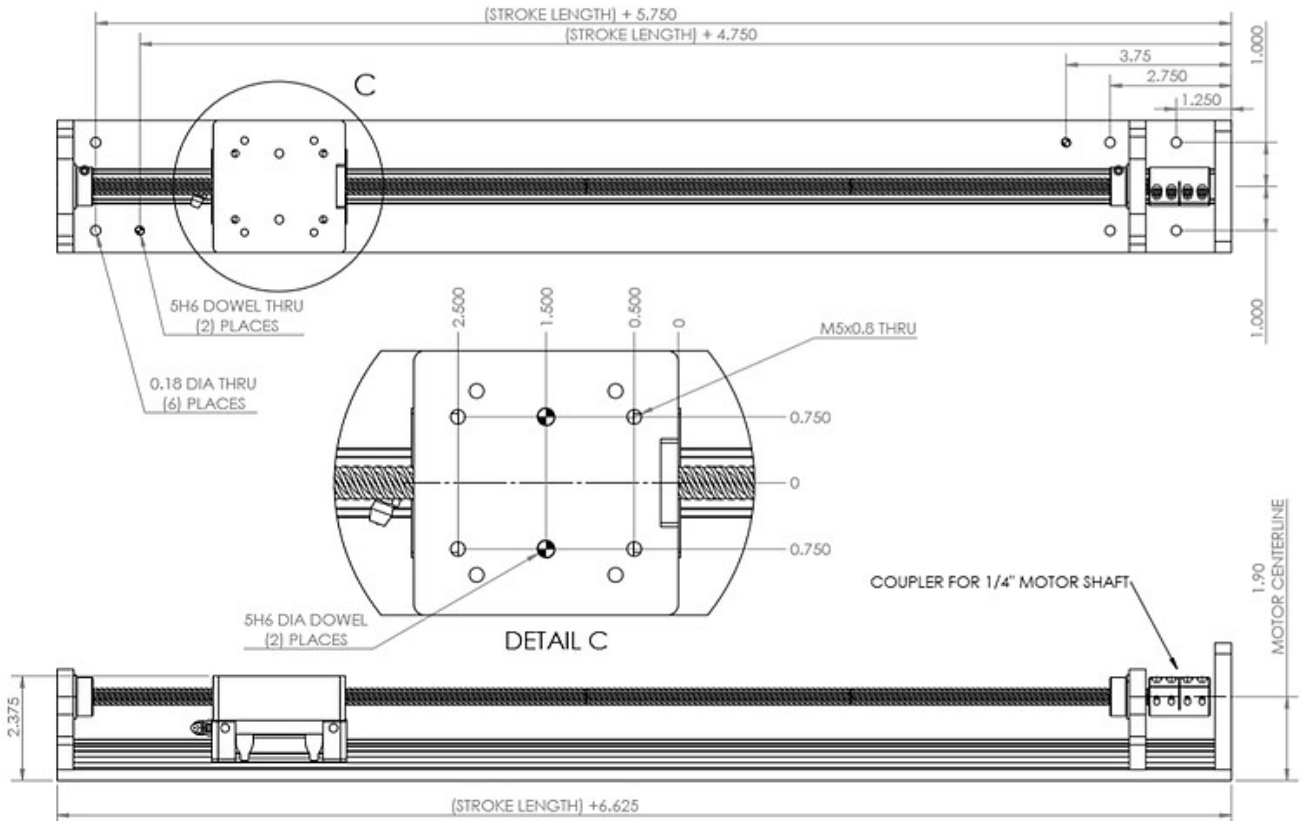

M_R

M_P

M_Y

STATIC RATED MOMENT					
M_R		M_P		M_Y	
kN-m	FT-LBS	kN-m	FT-LBS	kN-m	FT-LBS
0.12	88.5	0.10	73.75	0.10	73.75